


TR200 SERIES

TR208 | TR210



2" Cut Capacity

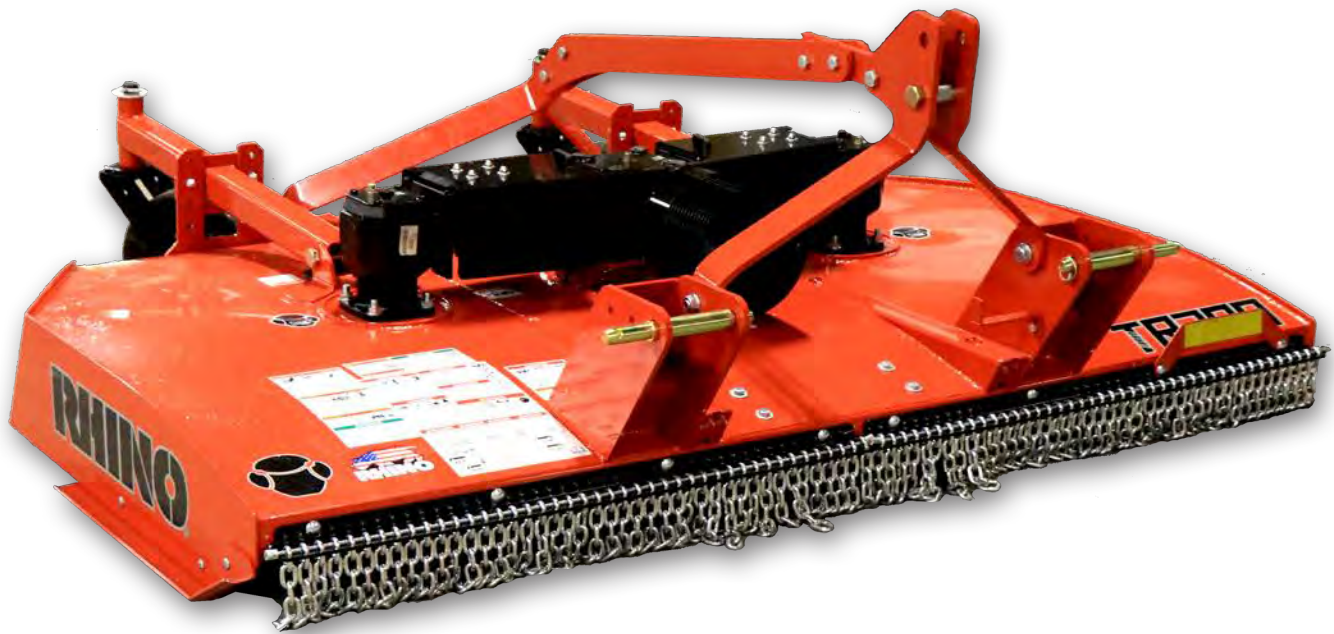

5 Year Limited Gearbox Warranty



Infinity Blade Carrier



Single or Double Chain Guards



EZ Clean Domed Deck



Cat 4 Driveline (Lift Type/Pull Type)



1/2" x 3" Blades



Low HP Requirements



TR 200 SERIES SPECIFICATIONS

Specifications	TR208	TR210
Cutting Width:	96"	120"
Overall Width:	103"	127 1/4"
Overall Length:	91" (Lift), 138" (Pull)	107 1/4" (Lift), 155 1/2" (Pull)
Cutting Height :	1" – 16"	1" – 14"
Height Adjustment:	2.5" x 8" Cylinder (Pull)	2.5" x 8" Cylinder (Pull)
Hitch:	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H., Pull	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H., Pull
Blade Carrier:	Infinity - Steel	Infinity - Cast
Blades:	1/2" x 3" Parallel Updraft	1/2" x 3" Parallel Updraft
PTO HP Required:	45 (Lift), 30 (Pull)	60 (Lift), 45 (Pull)
Gearbox Rating*:	100 HP (Center), 65 HP (Outboard)	100 HP (Center), 130 HP (Outboard)
Blade Tip Speed:	14,661 FPM (540 RPM)	16,696 FPM (540 RPM) 16,694 FPM (1000 RPM)
Cutting Capacity:	2"	2"
Driveline Size:	Cat 4 (Lift, Pull)	Cat 4 (Lift, Pull)
Driveline Protection:	Slip Clutch	
Deck Thickness:	12 Ga	
Side Skirt:	7 Ga	
Tire and Wheel:	Laminated Tires 4" x 8" (Lift) Laminated 6" x 9" x 20.75" (Pull) RhinoTrax Foam Filled 7" x 12" x 20.5" (Pull)	
Safety Deflector:	Single Chain Guards	
Warranty:	1 Year Machine, 1 Year Limited Driveline, 5 Year Limited Gearbox	

*Gearbox power rating based on actual field performance.

