

TW20 SERIES

TW25 • TW26 • TW27



Steel Infinity Blade Carrier



2" Cut Capacity



CAT 1 & CAT 2 Quick Hitch and iMatch**
Compatible



Available in 60", 72", and 84" cutting widths



Heavy-Duty Tailwheel (Single or Dual)



Tapered Side Skirts to Help Prevent Gouging




Smooth Domed Deck



High Capacity Cutting Chamber

**iMatch is a trademark of Deere & Company.

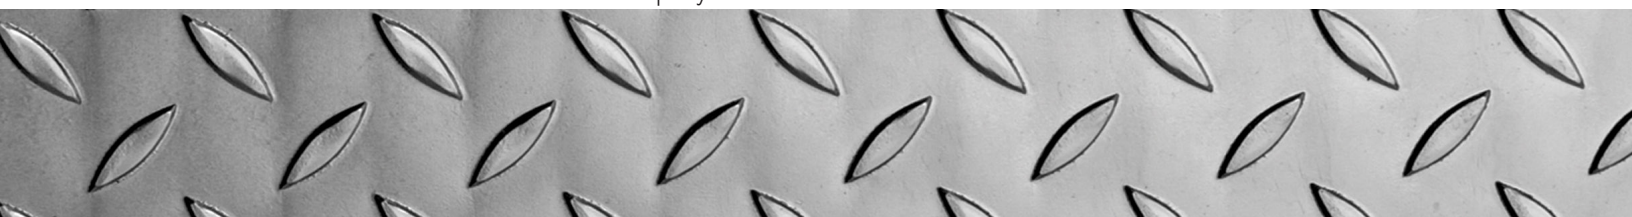

TW20 SERIES

SPECIFICATIONS

Specifications	TW25	TW26	TW27
Cutting Width:	60"	72"	84"
Overall Width:	64 1/4"	76 1/4"	88 1/4"
Overall Length:	108"	118"	135"
Cutting Height (Min):	1 1/2"	1 1/2"	1 1/2"
Hitch:	CAT 1/ CAT 2 Std. CAT 1/ CAT 2 Q.H. iMatch**	CAT 1/ CAT 2 Std. CAT 1/ CAT 2 Q.H. iMatch**	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H.
Blade Carrier:	Infinity - Steel	Infinity - Steel	Infinity - Steel
Blades:	1/2" x 3"	1/2" x 3"	1/2" x 3"
PTO HP Required (Min):	25	35	45
Gearbox Rating*:	65 HP	65 HP	130 HP
Blade Tip Speed (FPM):	14,335	14,963	14,369
Cutting Capacity:	2"	2"	2"
Driveline Size:	CAT 3	CAT 3	CAT 4
Driveline Protection:	Slip Clutch	Slip Clutch	Slip Clutch
Deck Thickness:	12 Ga	12 Ga	12 Ga
Side Skirt:	7 Ga	7 Ga	7 Ga
Tire and Wheel:	4" x 8" Laminated	4" x 8" Laminated	(1 or 2) 4" x 8" Laminated
Safety Deflector:	Deflectors or Chains	Deflectors or Chains	Deflectors or Chains
Weight (Approx): w/ Rubber Deflectors w/ Chains	720 lbs 760 lbs	800 lbs 865 lbs	single/double tailwheel 1105 lbs/1255 lbs 1180 lbs/1330 lbs

*Gearbox power rating based on actual field performance.

**iMatch is a trademark of Deere & Company.