


TR300 SERIES

TR308 | TR310



3" Cut Capacity

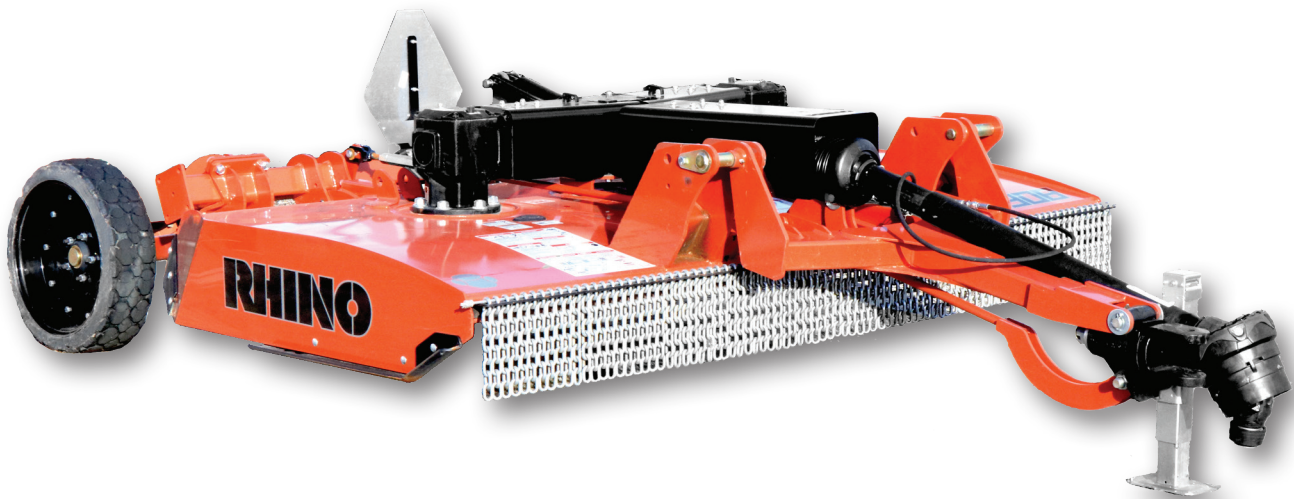

Infinity Blade Carrier



EZ Clean Domed Deck



1/2" x 4" Blades



6 Year Limited Gearbox Warranty




Single or Double Chains



Cat 4 Driveline (TR308 Lift Type/Semi Mount,
TR310 Lift Type)



Cat 5 Driveline (Pull Type)

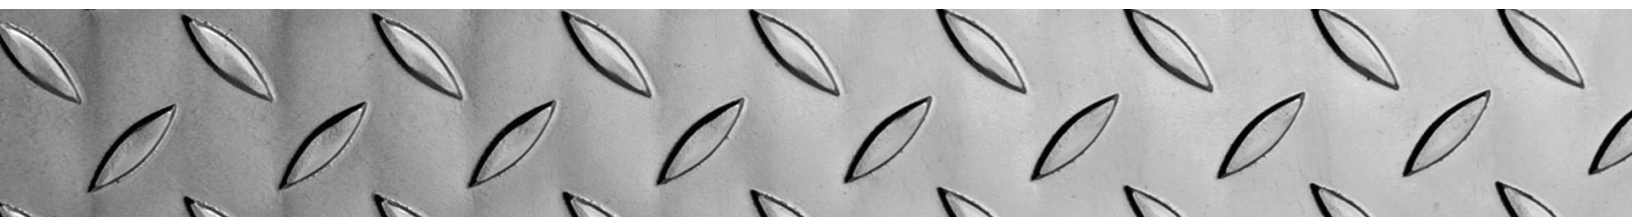

TR300 SERIES

SPECIFICATIONS

Specifications	TR308	TR310
Cutting Width:	96"	120"
Overall Width:	103"	127 1/4"
Overall Length:	94 1/2" (Lift), 97 1/2" (Semi), 143" (Pull)	107 1/4" (Lift), 155" (Pull)
Cutting Height:	1" – 15"	1" – 14"
Height Adjustment:	2.5" x 8" Cylinder (Pull/Semi)	2.5" x 8" Cylinder (Pull)
Hitch:	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H., Pull	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H., Pull
Blade Carrier:	Infinity - Steel	Infinity - Cast
Blades:	1/2" x 4" Parallel Updraft	1/2" x 4" Parallel Updraft
PTO HP Required:	55 (Lift), 35 (Pull, Semi)	80 (Lift), 55 (Pull)
Gearbox Rating*:	100 HP (Center), 130 HP (Outboard)	210 HP (Center), 210 HP (Outboard)
Blade Tip Speed:	16,512 FPM (540 RPM) 16,378 FPM (1000 RPM)	16,215 FPM (540 RPM) 16,238 FPM (1000 RPM)
Cutting Capacity:	3"	3"
Driveline Size:	Cat 4 (Lift, Semi), Cat 5 (Pull)	Cat 4 (Lift, 1000 Pull), Cat 5 (540 Pull)
Driveline Protection:	Slip Clutch	
Deck Thickness:	10 Ga	
Side Skirt:	1/4"	
Tire and Wheel:	Laminated Tires 4" x 8" (Lift) Laminated 6" x 9" x 20.75" (Semi) RhinoTrax Foam Filled 7" x 12" x 20.5" (Semi) Laminated 6.5" x 14" x 25.5" (Pull) HD RhinoTrax Foam Filled 25.6" x 7" x 18" (Pull)	Laminated 6" x 9" x 20.75" (Lift) RhinoTrax Foam Filled 7" x 12" x 20.5" (Lift) Laminated 6.5" x 14" x 25.5" (Pull) HD RhinoTrax Foam Filled 25.6" x 7" x 18" (Pull)
Safety Deflector:	Single or Double Chain Guards	
Warranty:	1 Year Machine, 1 Year Limited Driveline, 6 Year Limited Gearbox, 2 Year Seals	
Weight:	1,950 lbs (Lift) 2,350 lbs (Pull) 1,020 (Tongue)	2,670 lbs (Lift) 3,100 lbs (Pull) 1,280 (Tongue)

*Gearbox power rating based on actual field performance.