

RhinoAg: **Class A** Implements

# ▶ **SINGLE SPINDLES**



**RHINOAG**



# TW10 SERIES

## Maximum durability for a low competitive price.

The Twister 10 Series are available in 4-, 5-, and 6 foot cutting widths, guaranteeing this unit can easily handle all of your everyday jobs! These units feature a 60 HP Gearbox, CAT 3 Driveline, 12 gauge steel deck, and Infinity steel blade carrier. All of this comes together for one of the strongest, longest-lasting rotary cutters. You can get these Twisters in genuine Rhino orange or your choice of 5 customs colors!

For more, visit



- Available in 4-, 5- and 6 foot cutting widths
- CAT 1 - standard hitch
- Ideal for farms, ranches, and homesteads
- Available in Rhino orange or 5 custom colors



	TW14	TW15	TW16
Cutting Width	4'	5'	6'
Overall Width	52 1/2"	64"	76 1/4"
Overall Length	87"	99"	111"
Cutting Height (Min)	1 1/2"		
Hitch	CAT 1 - Std		
Blade Carrier	Infinity - Steel		
Blades	1/2" x 3"		
PTO HP Required (Min)	20		25
Gearbox Rating*	60 HP		
Blade Tip Speed (FPM)	15,608 FPM	16,117 FPM	14,963 FPM
Cutting Capacity	1"		
Driveline Size	CAT 3		
Driveline Protection	Shear Bolt or Slip Clutch		
Deck Thickness	12 Ga		
Side Skirt	10 Ga		
Tailwheel	Single		
Tire and Wheel	(1) 3.75" x 15" Solid Rubber Tire		
Safety Deflector	Front Belt / Rear Steel Band		
Weight (Approx)	460 lbs	530 lbs	630 lbs

\* Gearbox Rating Based on Field Performance

# TW20 SERIES

**Have the confidence to mow the most challenging terrain.**

With 5-, 6-, and 7 foot cutting widths, no job is too large for the Twister 20 Series rotary cutter. CAT 1 and CAT 2 compatibility ensures it will play well with whatever tractor you're driving, while a heavy-duty tailwheel and 2" cutting capacity promise nothing will be left standing in it's wake! The Twister 20 Series boasts a high-capacity cutting chamber under a baffled deck with tapered side-skirts. All this to say, you can cut what you want, when you want with no complaint from your rotary cutter.

For more, visit



- *Heavy-duty tailwheel*
- *Tapered side skirts to help prevent gouging*
- *Baffled deck*
- *High-capacity cutting chamber*

	TW25	TW26	TW27
Cutting Width	5'	6'	7'
Overall Width	64 1/4"	76 1/4"	88 1/4"
Overall Length	108"	118"	135"
Cutting Height (Min)	1 1/2"		
Hitch	CAT 1/ CAT 2 Std. CAT 1/ CAT 2 Q.H. iMatch™ *		CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H.
Blade Carrier	Infinity - Steel		
Blades	1/2" x 3"		
PTO HP Required (Min)	25	35	45
Gearbox Rating**	65 HP		130 HP
Blade Tip Speed (FPM)	14,335	14,963	14,369
Cutting Capacity	2"		
Driveline Size	CAT 3		CAT 4
Driveline Protection	Slip Clutch		
Deck Thickness	12 Ga		
Side Skirt	7 Ga		
Tailwheel	Single		
Tire and Wheel	(1) 4" x 8" Laminated		
Safety Deflector	Deflectors or Chains		
Weight (Approx)			
W/ Rubber Deflector	720 lbs	800 lbs	1,105 lbs
w/ Chains	760 lbs	865 lbs	1,180 lbs

\* Gearbox Rating Based on Field Performance

\*\* iMatch™ is a trademark of Deere & Company



# TW30 SERIES

## Show brush who's boss – without the buildup.

The TW30's complete the Twister Series of single-spindle rotary cutters. With a 3" cutting capacity, they are the first in the series to have a smooth, totally domed deck, helping reduce grass and debris buildup as you work. With their 1/2" x 4" updraft blades and their impressive 3" cutting capacity, these 5-, 6- and 7-foot monsters are eager to show brush who's boss without slowing you down in the process

For more, visit



- *Infinity cast blade carrier*
- *iMatch compatible*
- *CAT 4 Driveline*
- *Slip clutch driveline protection*

	TW35	TW36
Cutting Width	5'	6'
Overall Width	66 1/2"	78 1/2"
Overall Length	105"	121"
Cutting Height (Min)	1 1/2"	
Hitch	CAT 1/ CAT 2 Std. CAT 1/ CAT 2 Q.H. iMatch™*	
Blade Carrier	Infinity - Cast	
Blades	1/2" x 4" Updraft	
PTO HP Required (Min)	35	45
Gearbox Rating**	130 HP	
Blade Tip Speed (FPM)	14,497	14,854
Cutting Capacity	3"	
Driveline Size	CAT 4	
Driveline Protection	Slip Clutch	
Deck Thickness	10 Ga	
Side Skirt	1/4"	
Tailwheel	Single	
Tire and Wheel	(1) Laminated	
Safety Deflector	Chains	
Weight (Approx)	975 lbs	1,140 lbs

\* iMatch™ is a trademark of Deere & Company

\*\* Gearbox Rating Based on Field Performance



# DUAL TAILWHEEL

## Take on the toughest jobs with extra support.

These Twister mowers are available in a 2" or 3" cut capacity, CAT 4 driveline and 2 laminated tires.

The increased stability of two heavy-duty tailwheels gives you the piece of mind you need to take on the toughest jobs all while delivering a smooth, even cut.

- Available in 2" or 3" cut capacity
- Dual heavy-duty tailwheel increases stability
- Ideal for farms, ranches, and homesteads
- TW37 offered in both 540 or 1,000 RPM

### TW27DTW

### TW37DTW


Cutting Width	7'	7'
Overall Width	88 1/4"	90 1/2"
Overall Length	135"	136"
Cutting Height (Min)	1 1/2"	
Hitch	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H.	
Blade Carrier	Infinity - Steel	
Blades	1/2" x 3" Updraft	1/2" x 4" Updraft
PTO HP Required (Min)	45	60
Gearbox Rating**	130 HP	210 HP
Blade Tip Speed (FPM)	14,369 (540 RPM)	15,667 (540 RPM) 15,993 (1000 RPM)
Cutting Capacity	2"	3"
Driveline Size	CAT 4	
Driveline Protection	Slip Clutch	
Deck Thickness	12 Ga	10 Ga
Side Skirt	7 Ga	1/4"
Tailwheel	Dual	
Tire and Wheel	(2) 4" x 8" Laminated	
Safety Deflector	Deflectors or Chains	Chains
Weight (Approx)	1,330 lbs	1,500 lbs

\* iMatch™ is a trademark of Deere & Company

\*\* Gearbox Rating Based on Field Performance





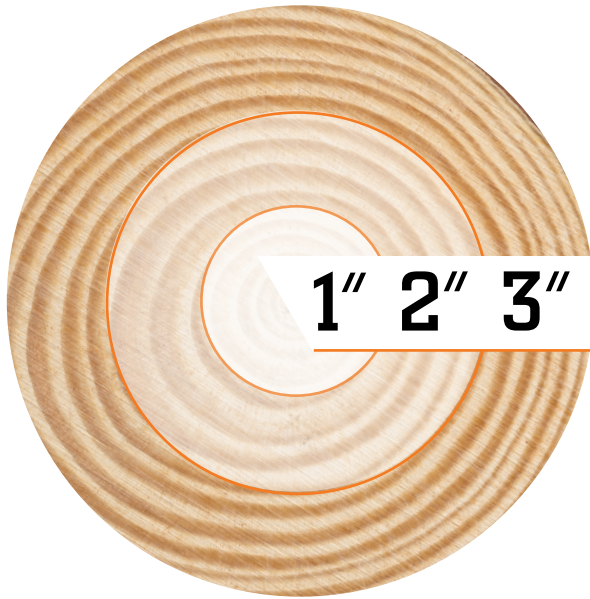

# CUTTING CAPACITY

When talking about cut capacity we are referring to the diameter of material the mower is capable of easily cutting through. The diagram to the left shows what that really looks like. Imagine the brush you tear through, and compare the branch sizes to this. That's what your Rhino can handle without breaking a sweat.

## CUSTOM COLORS


The Twister series is built standard with our genuine Rhino orange, or if you bleed another color we offer these five paint choices!



*Case IH*



*John Deere*

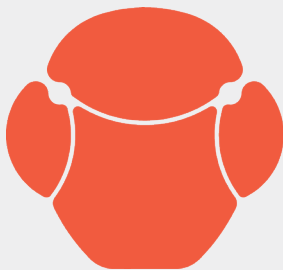

*Kubota*



*New Holland*



*Massey Furgeson*