


RhinoAg: **Multi-Spindles**

# ▶ **TR200 SERIES**



2" Cut Capacity

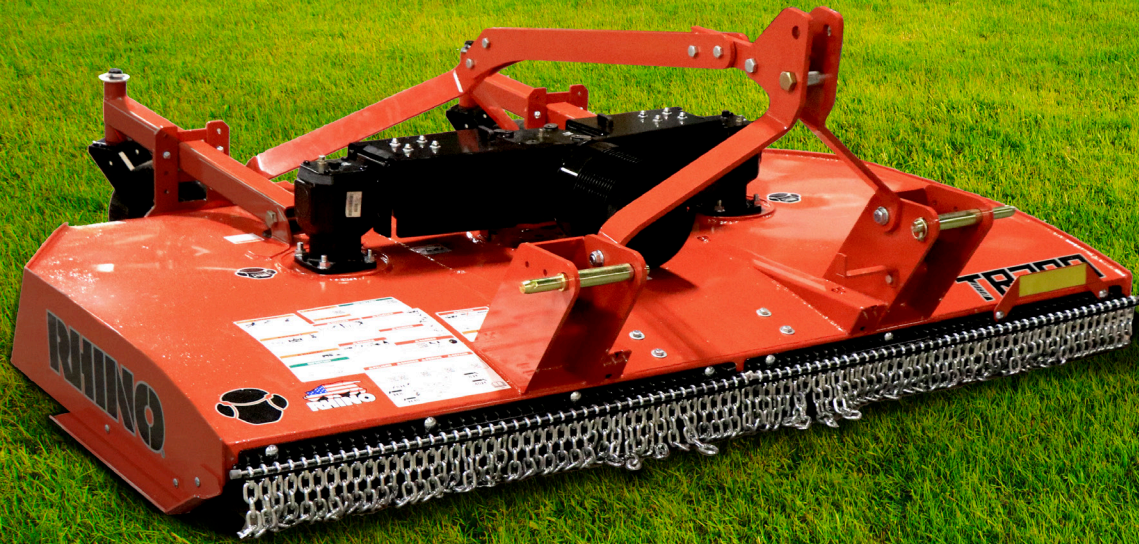

Infinity Blade Carrier



Low HP Requirements



1/2" x 3" Blades



5 Year Limited Gearbox Warranty



Single or Double Chains  
(Single chain guards only on TR208)



EZ Clean Domed Deck



Cat 4 Driveline (*Lift Type/ Pull Type*)

**RHINOAG**

# ▶ TR200 SERIES

Specifications	TR208	TR210
Cutting Width:	8' (96")	10' (120")
Overall Width:	103"	127 1/4"
Overall Length:	91" (Lift) 138" (Pull)	106 1/2" (Lift), 149 1/2" (Pull)
Cutting Height:	1" – 16"	1" – 15"
Height Adjustment:	2.5" x 8" Cylinder (Pull)	
Hitch:	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H., Pull	
Blade Carrier:	Infinity - Steel	Infinity - Cast
Blades:	1/2" x 3" Parallel Updraft	
PTO HP Required:	45 (Lift), 30 (Pull)	60 (Lift), 45 (Pull)
Gearbox Rating*:	100 HP (Center), 65 HP (Outboard)	100 HP (Center), 130 HP (Outboard)
Blade Tip Speed:	14,661 FPM (540 RPM)	16,969 FPM (540 RPM) 16,694 FPM (1000 RPM)
Cutting Capacity:	2"	
Driveline Size:	Cat 4 (Lift, Pull)	
Driveline Protection:	Slip Clutch	
Deck Thickness:	12 Ga	10 Ga
Side Skirt:	7 Ga	
Tire and Wheel:	Laminated Tires 4" x 8" (Lift) Laminated 6" x 9" x 20.75" (Pull) RhinoTrax Foam Filled 7" x 12" x 20.5" (Pull)	
Safety Deflector:	Single Chain Guards	Single or Double Chain Guards
Warranty:	1 Year Machine, 1 Year Limited Driveline, 5 Year Limited Gearbox	
Tongue Weights:	1,600 lbs (Lift) 1,980 lbs (Pull) 860 (Tongue)	2,170 lbs (Lift) 2,590 lbs (Pull) 1,120 (Tongue)
Weight:	1,950 lbs (Lift) 2,350 lbs (Pull)	2,670 lbs (Lift) 3,100 lbs (Pull)

\*Gearbox power rating based on actual field performance.

