


RhinoAg: Multi-Spindles

TR200 SERIES



2" Cut Capacity

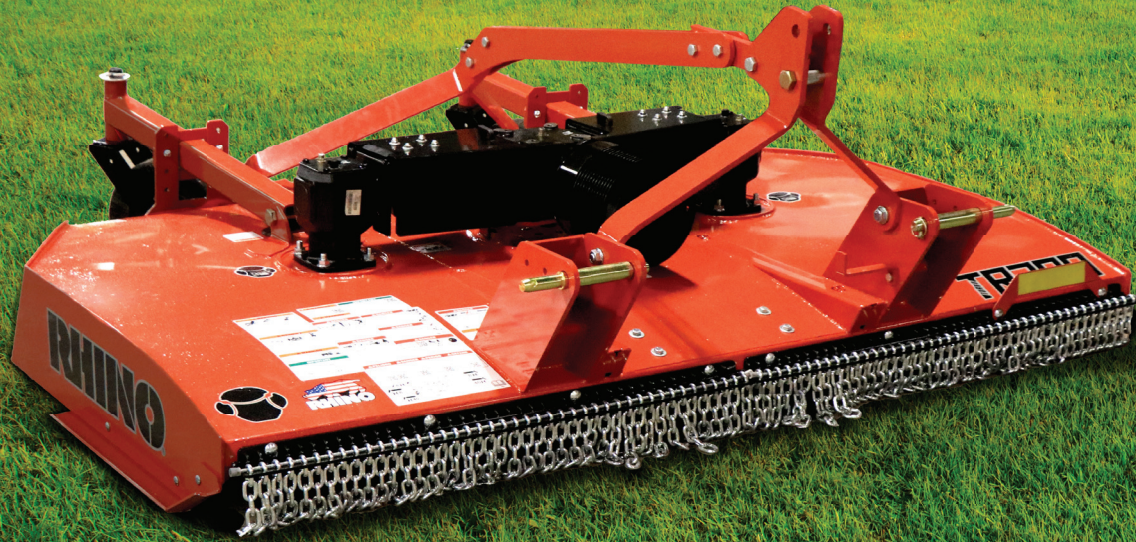

10 Year Limited Gearbox Warranty



Infinity Blade Carrier



Single or Double Chains
(Single chain guards only on TR208)



Low HP Requirements



EZ Clean Domed Deck



1/2" x 3" Blades



Cat 4 Driveline *(Lift Type/ Pull Type)*

TR200 SERIES

Specifications	TR208	TR210
Cutting Width:	8' (96")	10' (120")
Overall Width:	103"	127 1/4"
Overall Length:	91" (Lift) 138" (Pull)	106 1/2" (Lift), 149 1/2" (Pull)
Cutting Height:	1" – 16"	1" – 15"
Height Adjustment:	2.5" x 8" Cylinder (Pull)	
Hitch:	CAT 2/ CAT 3 Std. CAT 2/ CAT 3 Q.H., Pull	
Blade Carrier:	Infinity - Steel	Infinity - Cast
Blades:	1/2" x 3" Parallel Updraft	
PTO HP Required:	45 (Lift), 30 (Pull)	60 (Lift), 45 (Pull)
Gearbox Rating*:	100 HP (Center), 65 HP (Outboard)	100 HP (Center), 130 HP (Outboard)
Blade Tip Speed:	14,661 FPM (540 RPM)	16,969 FPM (540 RPM) 16,694 FPM (1000 RPM)
Cutting Capacity:	2"	
Driveline Size:	Cat 4 (Lift, Pull)	
Driveline Protection:	Slip Clutch	
Deck Thickness:	12 Ga	10 Ga
Side Skirt:	7 Ga	
Tire and Wheel:	Laminated Tires 4" x 8" (Lift) Laminated 6" x 9" x 20.75" (Pull) RhinoTrax Foam Filled 7" x 12" x 20.5" (Pull)	
Safety Deflector:	Single Chain Guards	Single or Double Chain Guards
Warranty:	1 Year Machine - 1 Year Limited Driveline - 10 Year Limited Gearbox	
Tongue Weights:	1,600 lbs (Lift) 1,980 lbs (Pull) 860 (Tongue)	2,170 lbs (Lift) 2,590 lbs (Pull) 1,120 (Tongue)
Weight:	1,950 lbs (Lift) 2,350 lbs (Pull)	2,670 lbs (Lift) 3,100 lbs (Pull)

*Gearbox power rating based on actual field performance.