

# RHINO®

**FLAIL MOWERS**

**RSM5 • RSM6 • RSM6H • RSM7H**


## FLAIL MOWERS



- ◇ Our new RSM and RSM-H Flail Mowers are "Rhino Tough", while still providing outstanding mowing performance.
- ◇ RSM models use a Universal Boot type flail with 1" cut capacity and an outstanding finish cut performance.
- ◇ RSM models feature a 6 1/4" right offset to prevent running in both tractor tire tracks.
- ◇ The full length rear roller provides an even cut across the full width of the machine and reduces clumping of cut material in wet conditions.
- ◇ RSM models are available in 5' and 6' mowing widths. The heavier RSM-H models are available in 6' or 7' widths.
- ◇ RSM-H models use a Fine Cut Brush Flail with 2" cut capacity to provide a great finish cut even in tough conditions.
- ◇ RSM-H models feature a 5" right offset and can be hydraulically offset up to 16" to get around obstacles while on the go!
- ◇ RSM-H models use individually adjustable rake tines, keeping heavier materials in the cutting chamber longer for better mulching.

[www.RHINOAG.com](http://www.RHINOAG.com)



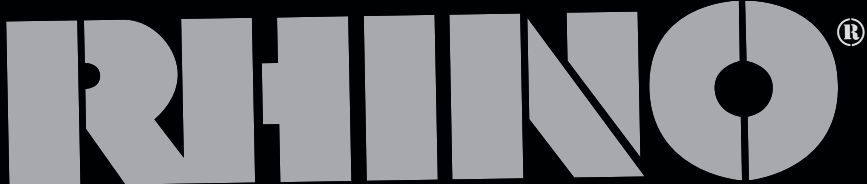

## FLAIL MOWERS

## SPECIFICATIONS

Specifications	RSM5	RSM6	RSM6H	RSM7H
Tractor Size (Min PTO HP)	25	25	35	35
Tractor PTO Type	540	540	540	540
Hitch Size	Cat I	Cat I	Cat I-II	Cat I-II
Center Mount	No	No	No	No
Hitch Offset	6 1/4" Rigid	6 1/4" Rigid	5" to 16" Hydraulic	5" to 16" Hydraulic
Mowing Width	61"	73"	73"	86"
Overall Width	68"	80"	80"	93"
Overall Length	43"	43"	43"	43"
Mowing Height Range	1.4" - 3.4"	1.4" - 3.4"	.35" - 3.5"	.35" - 3.5"
Rotor Diameter	5.5"	5.5"	5.5"	5.5"
Rotor Speed (RPM)	2150	2150	2150	2150
Blades	Fine Cut Grass Blade	Fine Cut Grass Blade	Fine Cut Brush Hammer	Fine Cut Brush Hammer
Number of Blades	30 Pair	36 Pair	20 Hammers	24 Hammers
Blade Rotation	Forward	Forward	Forward	Forward
Cutting Capacity	1"	1"	2"	2"
Gearbox Rating	60 HP	60 HP	60 HP	60 HP
Driveline Size	Cat 4	Cat 4	Cat 4	Cat 4
Drive Belt	"B" Size	"B" Size	"SPB" Size	"SPB" Size
Rear Roller Diameter	7.5"	7.5"	7.5"	7.5"
Skid Shoes	Std	Std	Std	Std
Weight (Approx)	750 lbs	800 lbs	1166 lbs	1320 lbs



A member of the **Alamo Group**  
 1020 S Sangamon Ave, Gibson City, IL 60936  
 TEL: 800-221-2855 Option 3  
 FAX: 877-408-3298  
[www.rhinoag.com](http://www.rhinoag.com)



Rhino® guarantees each piece of Rhino® equipment against defective materials and workmanship for a period of one year from date of delivery to the purchaser unless otherwise noted.

Rhino® reserves the right to make changes and/or improvements in design and construction of parts or machines shown herein without notice or obligation.



Servis and Rhino are registered trademarks of the Alamo Group Inc.